


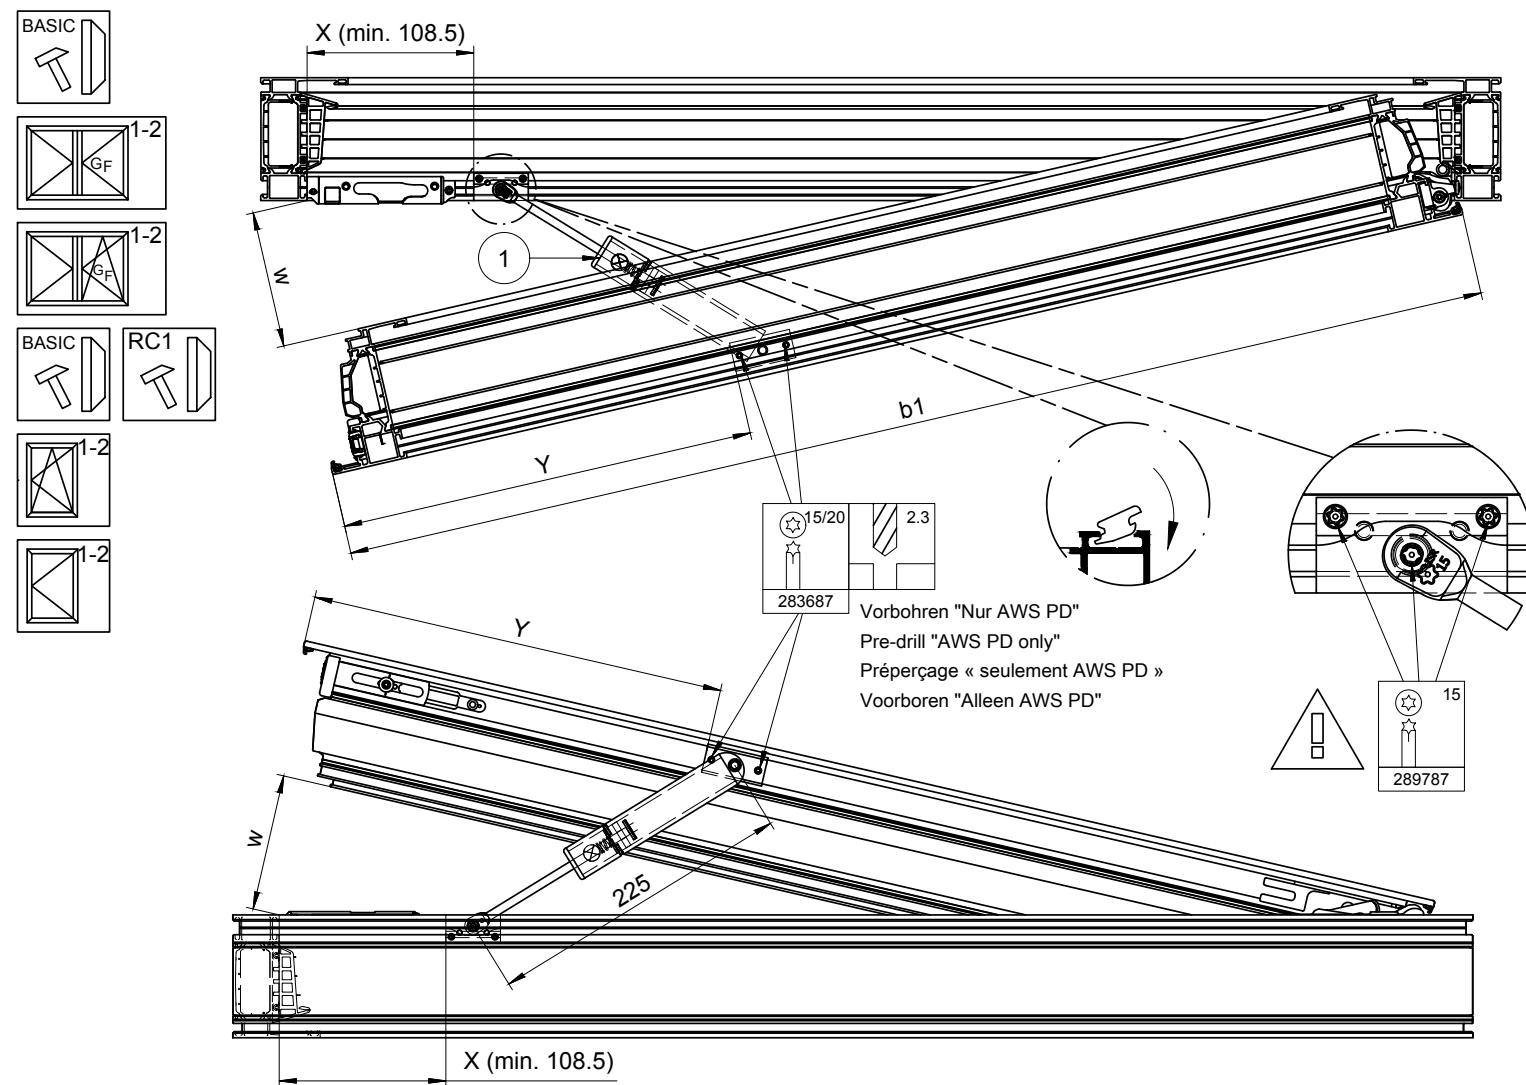


Ansicht von unten
View from below
Vue de dessous
Onderaanzicht

	w = 89 mm		w = 100 mm	
	Y [mm]	b1 [mm]	Y [mm]	b1 [mm]
AWS 50	334	550 - 1700	332	530 - 1700
AWS 60		530 - 1700	331	510 - 1700
AWS 65				505 - 1700
AWS 70		520 - 1700		
AWS 75	331	505 - 1700	330	500 - 1550
AWS 90	330		326	
			360	1551 - 1700
AWS 120	324	500 - 1000	320	495 - 850
	490	1001 - 1700	560	851 - 1700

Maß X ist variabel, Öffnungsbegrenzer komplett strecken
Dimension X is variable, completely extend limiting stay
La cote X est variable, étirer complètement le limiteur d'ouverture
Maat X is variabel, openingsbegrenzer compleet strekken

1	C0	277441	1		
		277442	10		

K1013041

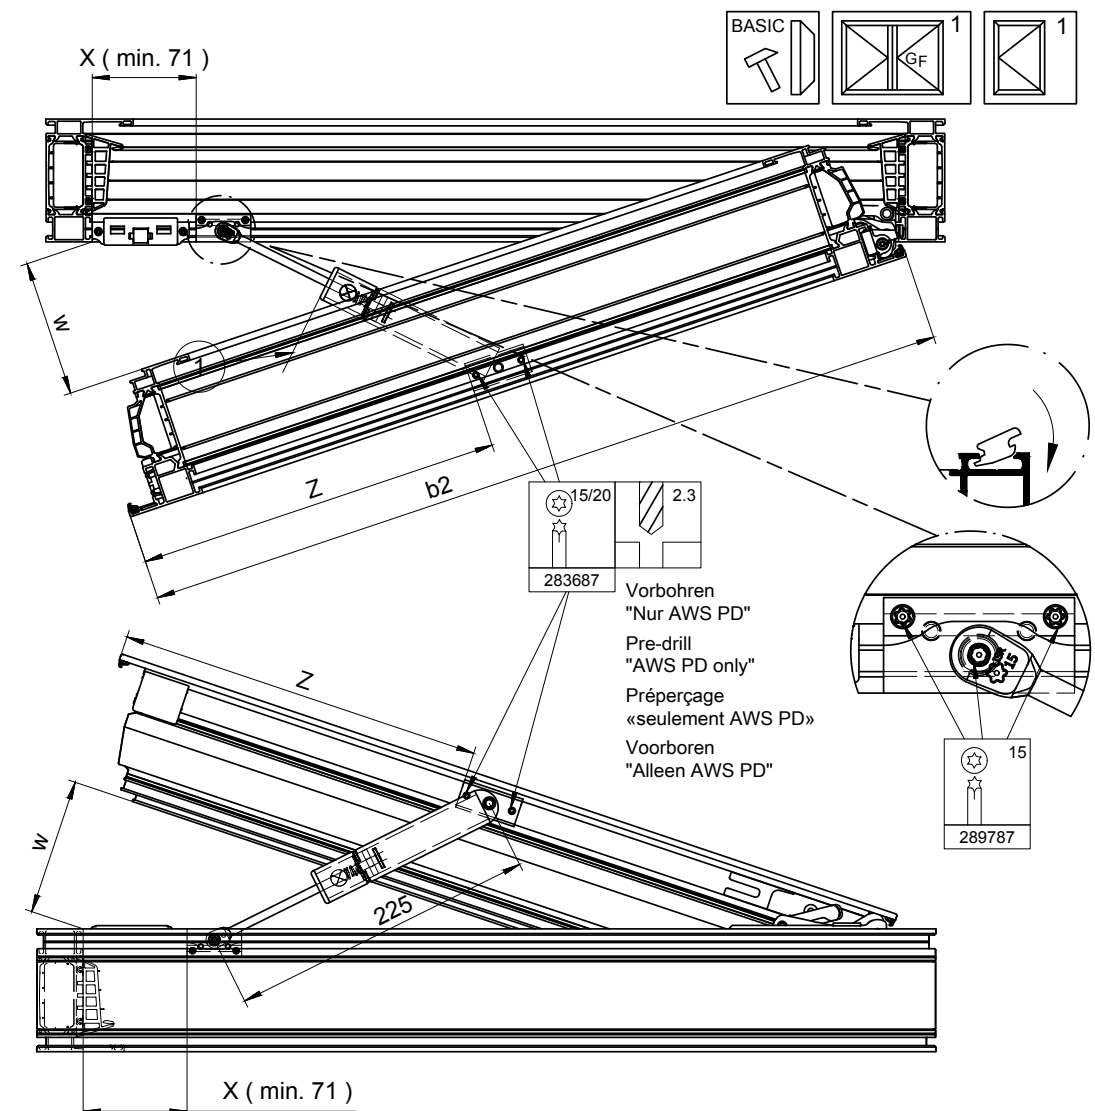

Ansicht von unten
View from below
Vue de dessous
Onderaanzicht

	w = 89 mm		w = 100 mm	
	Z [mm]	b2 [mm]	Z [mm]	b2 [mm]
AWS 50	295	480 - 1700	292	465 - 1700
AWS 60	295	470 - 1700	291	
AWS 65	294		290	
AWS 70				
AWS 75	291	465 - 1700	286	460 - 1250
AWS 90	289		360	1251 - 1700
AWS 120	280	455 - 850	276	450 - 750
	490	851 - 1700	520	751 - 1500

Zubehör - Innen öffnend
- energiev. Öffnungsbegr. Gr. 0
Accessories - Inward-opening
- Energy-absorbing limiting stay Size 0
Accessoires - À ouverture vers l'intérieur
- alimentation en énergie Limite d'ouvert. Taille 0
Accessoires - Naar binnen openend
- Energiev. openingsbegr. Gr. 0

K1017431

0201

Schüco AvanTec
SimplySmart