



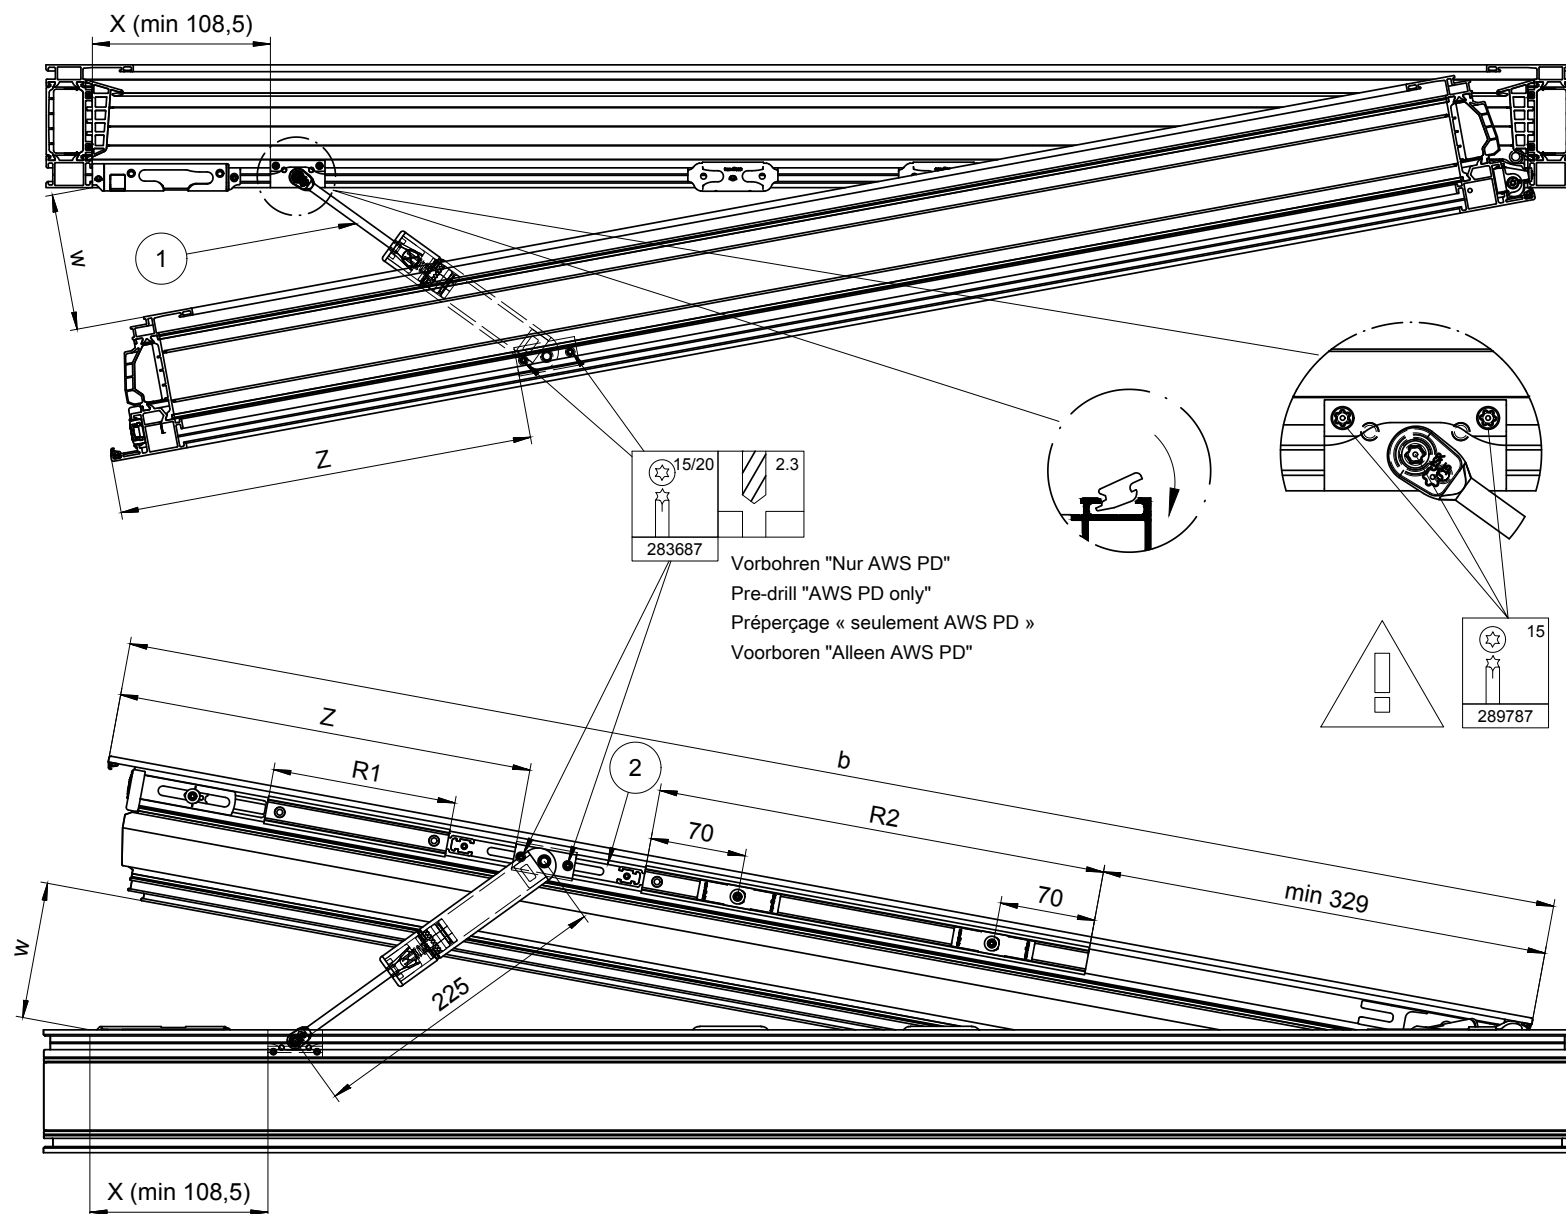

Ansicht von unten
View from below
Vue de dessous
Onderaanzicht

Maß X ist variabel, Öffnungsbegrenzer komplett strecken
Dimension X is variable, completely extend limiting stay
La cote X est variable, étirer complètement le limiteur d'ouverture
Maat X is variabel, openingsbegrenzer compleet strekken

	w = 89 mm				w = 100 mm			
	R1 [mm]	R2 [mm]	Z [mm]	b [mm]	R1 [mm]	R2 [mm]	Z [mm]	b [mm]
AWS 50	150	b - 745,5	321	1000 - 1700	150	b - 745,5	321	1000 - 1700
AWS 60								
AWS 65								
AWS 70								
AWS 75								
AWS 90	240	b - 835,5	411	1000 - 1400	240	b - 835,5	411	1000 - 1500
AWS 120								1000 - 1200

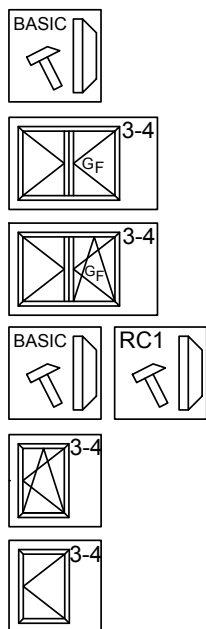

Pos			
1	C0	277441	1
2		277442	10
		277282	1

Zubehör - Innen öffnend - energiev. Öffnungsbegr. Gr. 0	K1017432
Accessories - Inward-opening - Energy-absorbing limiting stay Size 0	0201
Accessoires - À ouverture vers l'intérieur - alimentation en énergie Limite d'ouvert. Taille 0	Schüco AvanTec SimplySmart
Accessoires - Naar binnen openend - Energiev. openingsbegr. Gr. 0	